

# Sand Separators



**T Style (NT)**



**Combo Style (CF)**



**L Style (L)**


- Various installation configurations.
  - Inline "T"
  - 90° "L" (Available with High flow or Low flow - See Specifications)
  - "Combo" (you choose L or T)
- "Spin-Out" action separates heavier than water particles away from screen into collection chamber
- Screen portion of element removes lighter particles
- Reducer bushings available to adapt inlet/outlet size
- Pressure loss information is based on clean water. Sediment and mesh variation will affect actual losses.

## SPECIFICATIONS


Model No.	*Min./Max. Flow	Inlet/Outlet	Length	Width
NT 1 SO-□P	1-25 GPM	1" SLIP	14 3/8"	5"
NT 1.5 SO-□P	10-50 GPM	1 1/2" SLIP	15 3/8"	5 1/4"
NT 2 SO-□P	18-100 GPM	2" SLIP	17 7/8"	5 1/2"
CF 1.5 SO-□P	10-50 GPM	1 1/2" SLIP	16 5/8"	5 1/4"
CF 2 SO-□P	18-100 GPM	2" SLIP	18 7/8"	5 1/2"
L 1.5 SO-□LP	5-20 GPM	1 1/2" SLIP	14 7/8"	4 1/2"
L 1.5 SO-□HP	15-40 GPM	1 1/2" SLIP	14 7/8"	4 1/2"
L 2 SO-□P	35-90 GPM	2" SLIP	20 7/8"	5 1/2"

□ Indicate mesh size when ordering.

\* Minimum flow needed for "Spin-out" action.

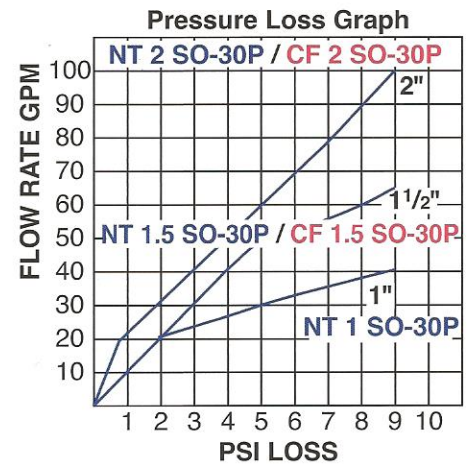

**T & Combo Style**

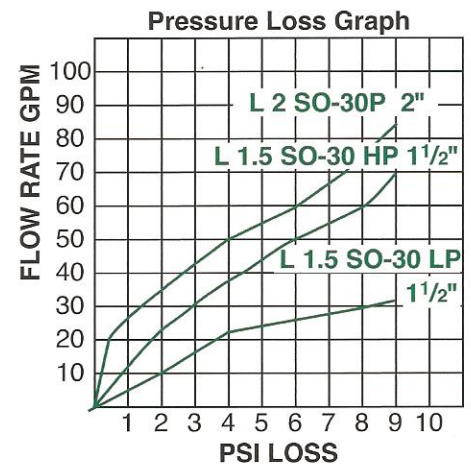

**L Style**